




MCHG2L Dimensions $\phi 32 \sim \phi 80$

LOWER HEIGHT of THREE JAW GRIPPERS

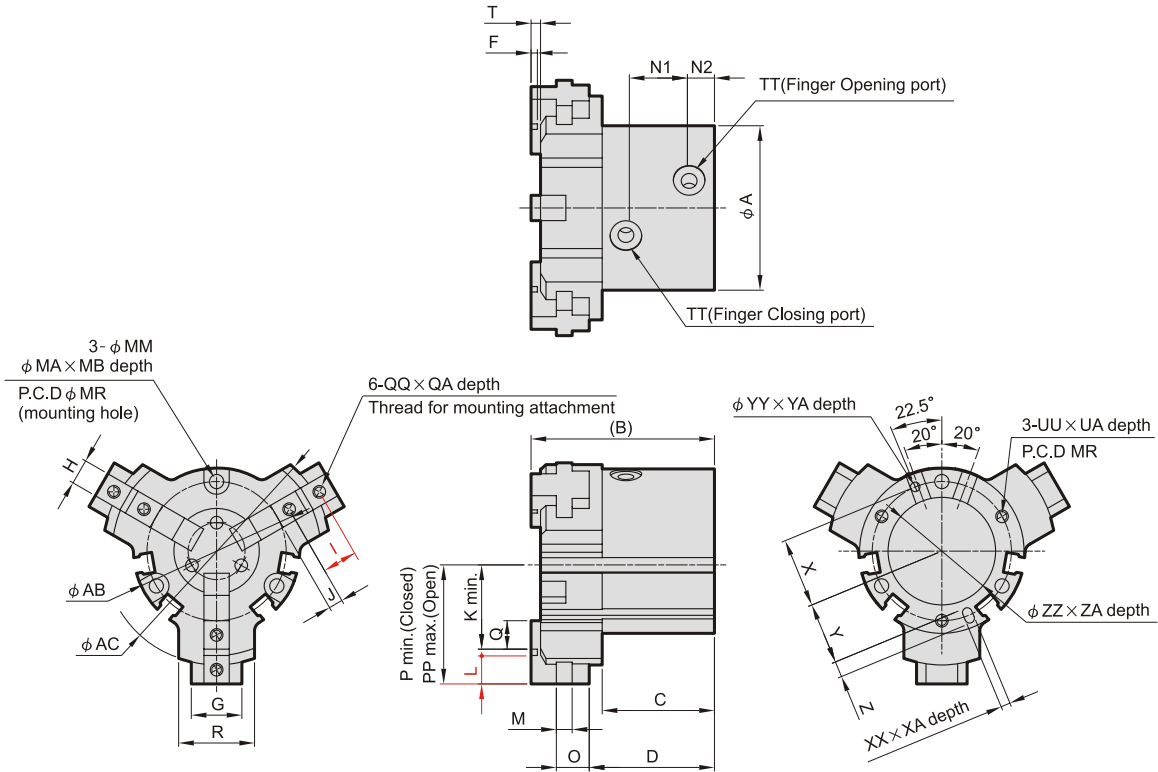

Auto switch mounting groove position (2 places)

Mounting hole counter bore dimensions

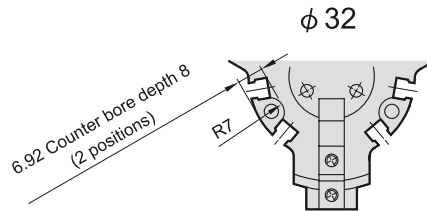

Note) The counter bore configuration differs only for the mounting hole section between the auto switch mounting grooves. ($\phi 32$ only)

Code Tube I.D.	A	AB	AC	B	C	D	E	F	G	H	I	J	K	L	M	MA	MB	MM	MR	N1	N2	O	P	PP	Q
32	52	52.6	72	58	35.5	39.6	6	2	16	8h9 ⁺⁰ _{-0.036}	11	4.5	23	2H9 ^{+0.025} ₋₀	5	8	8	4.5	44	20	8	10.4	34	42	9
40	62	62.6	82	64	38.5	42.5	8	2	18	8h9 ⁺⁰ _{-0.036}	12	4.5	25.5	3H9 ^{+0.025} ₋₀	7	9.5	9.5	5.5	53	22	9	13.5	37.5	47.5	9
50	70	70.6	104	77.5	46.5	51.3	7	2	20	10h9 ⁺⁰ _{-0.036}	14	5	32	4H9 ^{+0.030} ₋₀	8	9.5	9.5	5.5	62	29	9	17.7	46	60	10
63	86	86.6	120	89	51	58.5	7.5	3	26	12h9 ⁺⁰ _{-0.043}	17	5.5	37	6H9 ^{+0.030} ₋₀	10	11	17	6.6	76	30.5	12	19.5	54	70	11
80	106	106.6	140	116	70	78.5	9	4	30	14h9 ⁺⁰ _{-0.043}	20	6	40.5	8H9 ^{+0.036} ₋₀	11	11	23	6.6	95	37.5	14	23.5	60.5	80.5	12

Code Tube I.D.	QA	QQ	R	T	TT	UA	UU	X	XA	XX	Y	YA	YY	Z	ZA	ZZ
32	8	M4×0.7	24	3	M5×0.8	6	M4×0.7	22	3	3H9 ^{+0.025} ₋₀	19.5	3	3H9 ^{+0.025} ₋₀	5	2	34H9 ^{+0.062} ₋₀
40	8	M4×0.7	30	3	M5×0.8	10	M5×0.8	26.5	4	4H9 ^{+0.030} ₋₀	23.5	4	4H9 ^{+0.030} ₋₀	6	2	42H9 ^{+0.062} ₋₀
50	10	M5×0.8	32	3	M5×0.8	10	M5×0.8	31	4	4H9 ^{+0.030} ₋₀	28	4	4H9 ^{+0.030} ₋₀	6	2	52H9 ^{+0.074} ₋₀
63	10	M5×0.8	40	4	M5×0.8	12	M6×1	38	5	5H9 ^{+0.030} ₋₀	34.5	5	5H9 ^{+0.030} ₋₀	7	2.5	65H9 ^{+0.074} ₋₀
80	12	M6×1	50	5	Rc1/8	12	M6×1	47.5	6	6H9 ^{+0.030} ₋₀	43.5	6	6H9 ^{+0.030} ₋₀	8	3	82H9 ^{+0.087} ₋₀

